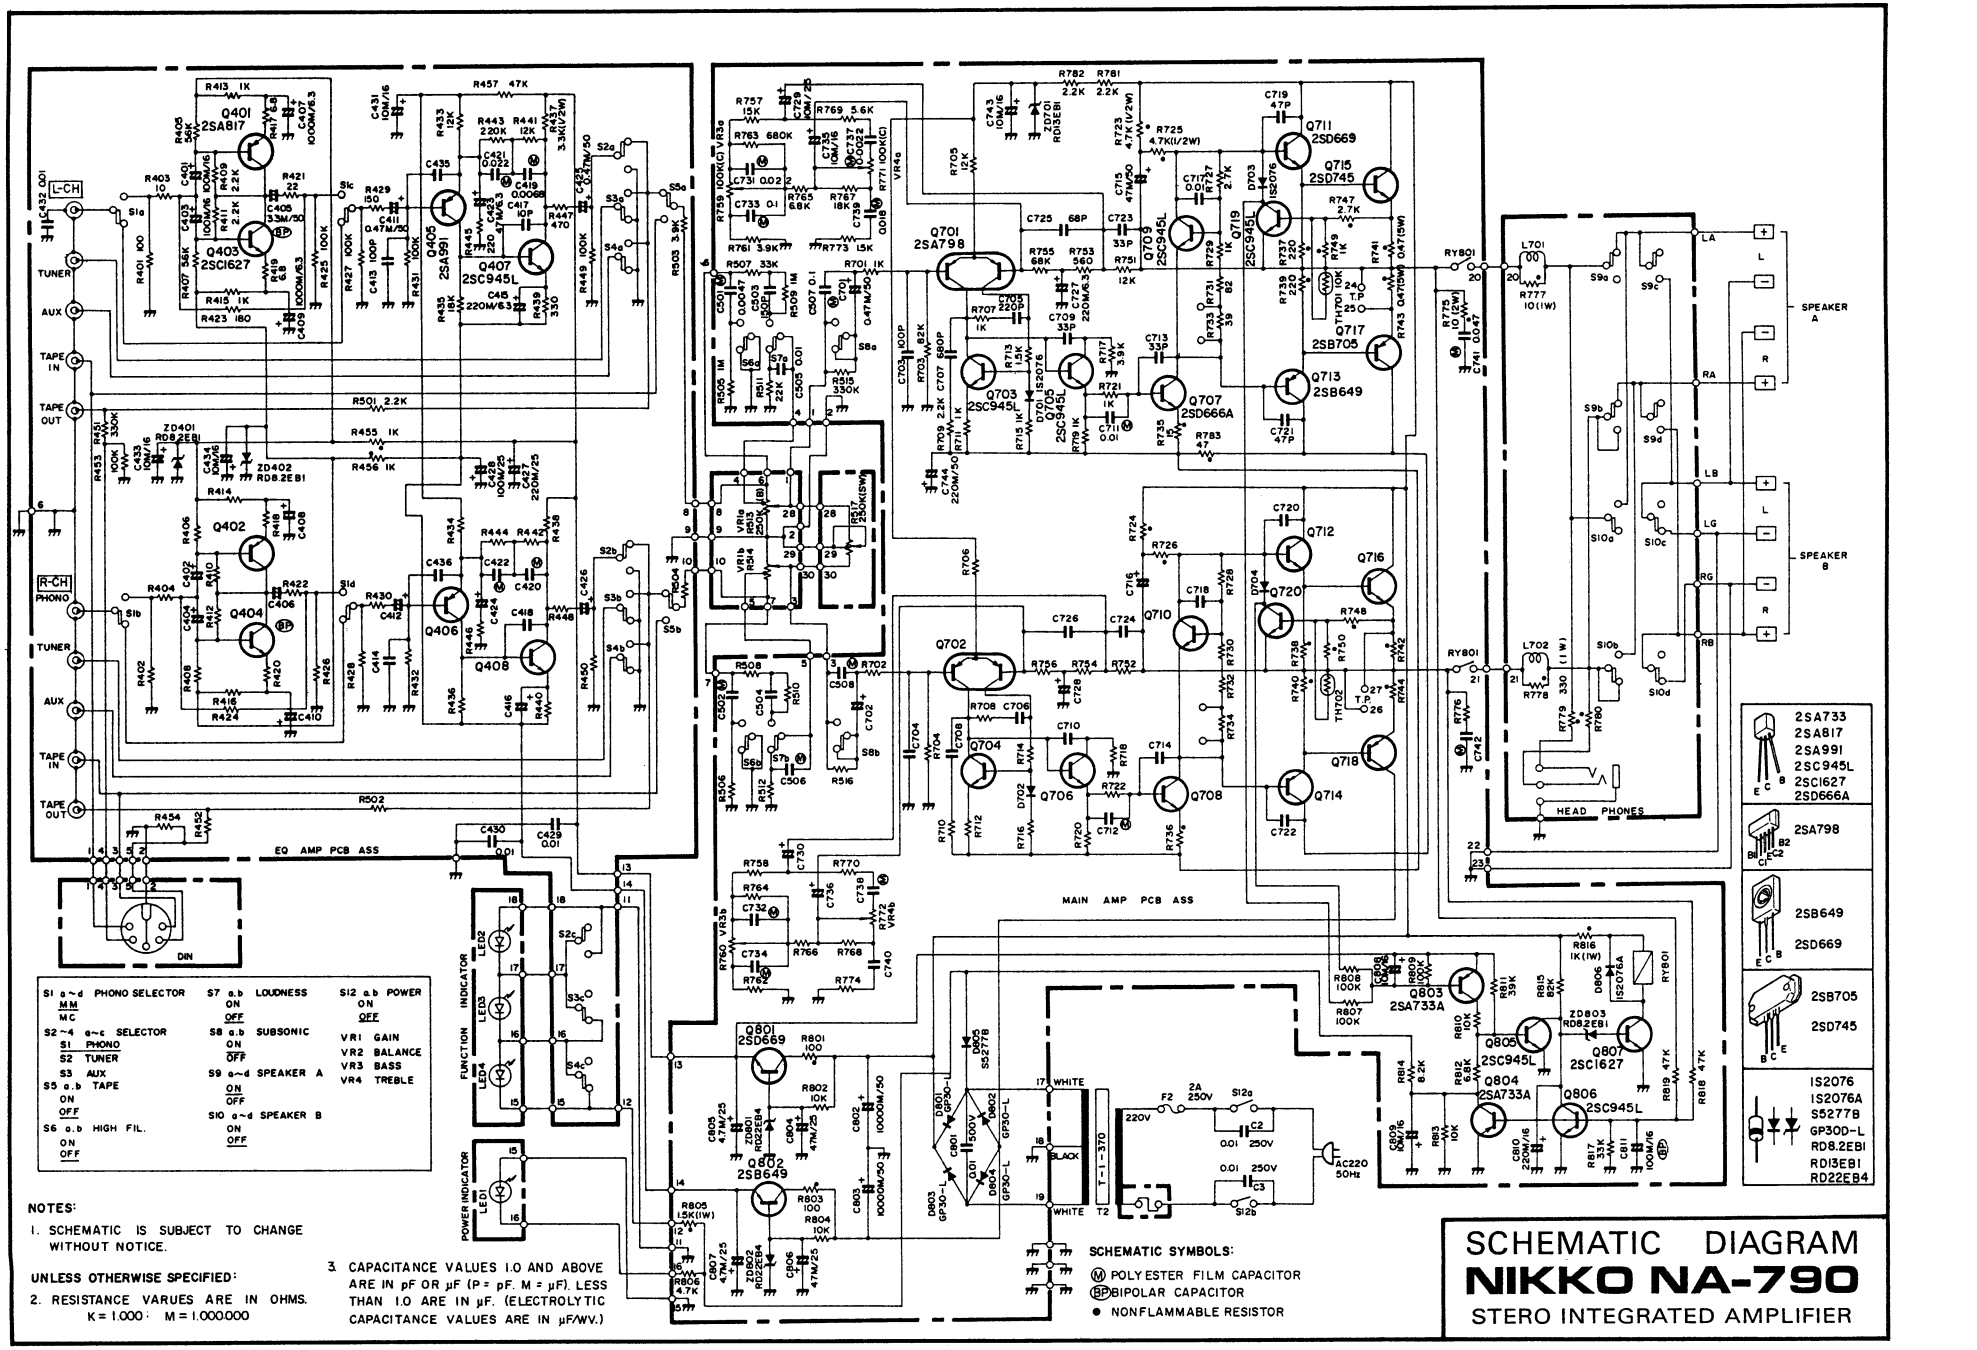

NOTES:

1. SCHEMATIC IS SUBJECT TO CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED:

2. RESISTANCE VARUES ARE IN OHMS. K = 1.000 · M = 1.000.000

3. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR μF (P = pF. M = μF). LESS THAN 1.0 ARE IN μF. (ELECTROLYTIC CAPACITANCE VALUES ARE IN μF/WV.)

SCHEMATIC SYMBOLS:

- (M) POLYESTER FILM CAPACITOR
- (BP) BIPOLAR CAPACITOR
- ● NONFLAMMABLE RESISTOR

SCHEMATIC DIAGRAM
NIKKO NA-790
STERO INTEGRATED AMPLIFIER